




LIQUID FEED PROGRAM | FLOWER LAYOUT HI-FLO PANEL CONFIGURATION

HI-FLO rated for 2.2–40 GPM or 4.3–116 PSI

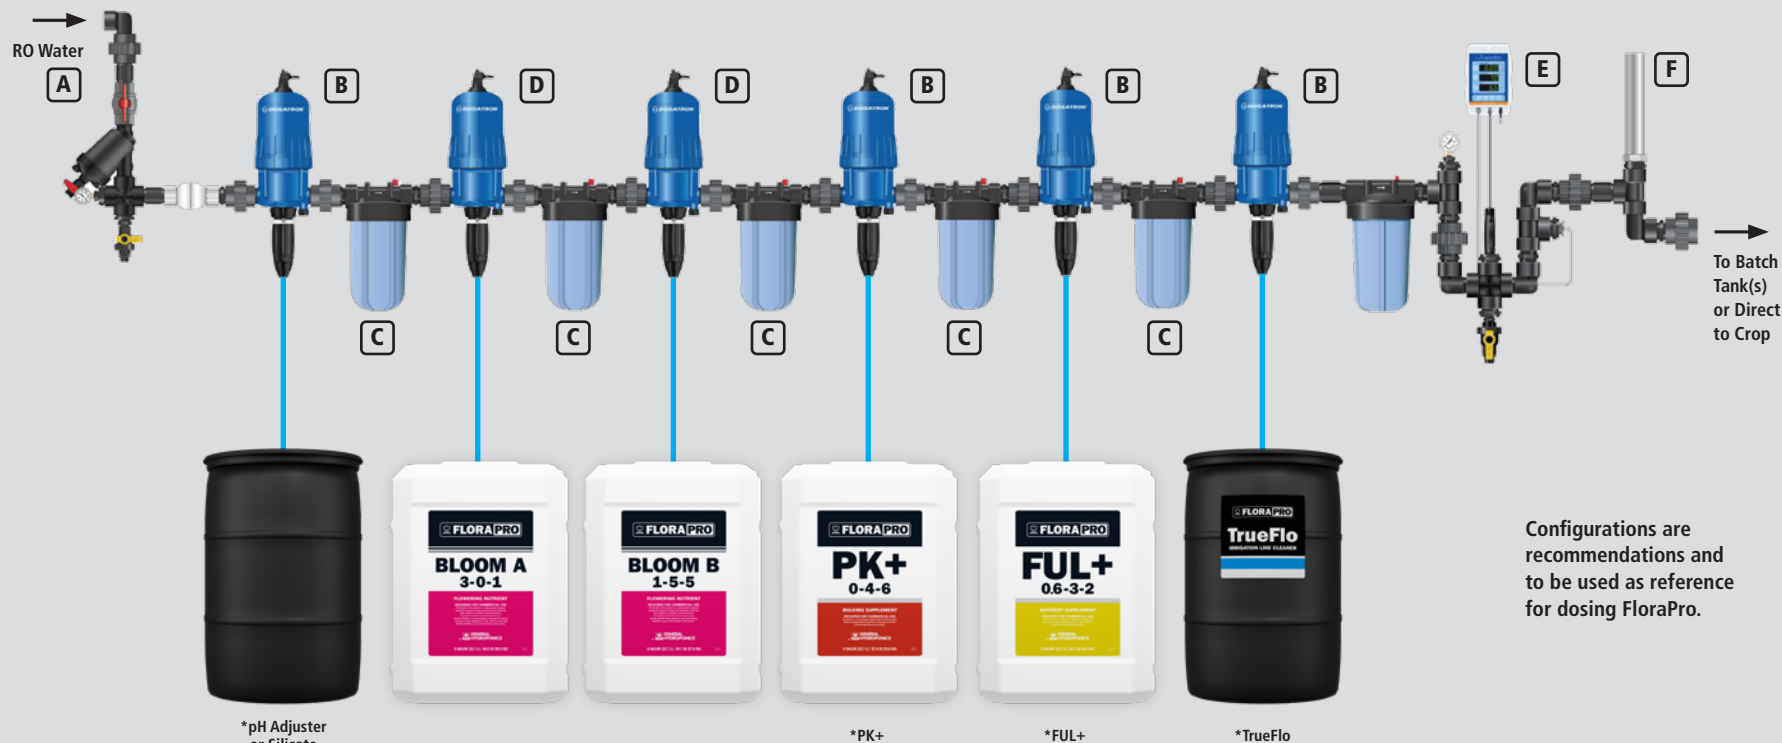

Configurations are recommendations and to be used as reference for dosing FloraPro.

BY **GENERAL HYDROPONICS®**

If you have questions or are looking for alternative options please contact Sales@GeneralHydroponics.com or Dosatron support at 1-800-523-8499

Tag	Qty	Part Number	Description
A	1	HYKSTART150	Hi-Flo 1 1/2" Starter Kit
*B	4	D40MZ3000BPVFHY D40MZ3000BPAFHY	40 GPM Dosing Pump 1.25 – 7.5 mL
C	5	HYKMC150	Hi-Flo 1 1/2" Mixing Chamber Kit
D	2	D40MZ1000BPVFHY	40 GPM Dosing Pump 3.75 – 37.5 mL
E	1	HYKMON150	Hi-Flo 1 1/2" Monitor Kit
F	1	WHA150-SS-KIT	Water Hammer Arrestor Kit

*SEAL OPTIONS

Viton Seals (VF) For products with neutral to acidic pH. (pH Down, PK+, FUL+ & TrueFlo)

Aflas Seals (AF) For products with a higher than neutral to alkaline pH. (Silicates & pH Up)