




An Ingersoll Rand Business

LIQUID FEED PROGRAM | VEGETATIVE LAYOUT LO-FLO PANEL CONFIGURATION

LO-FLO rated for 0.05 – 14 GPM or 4.3 – 85 PSI

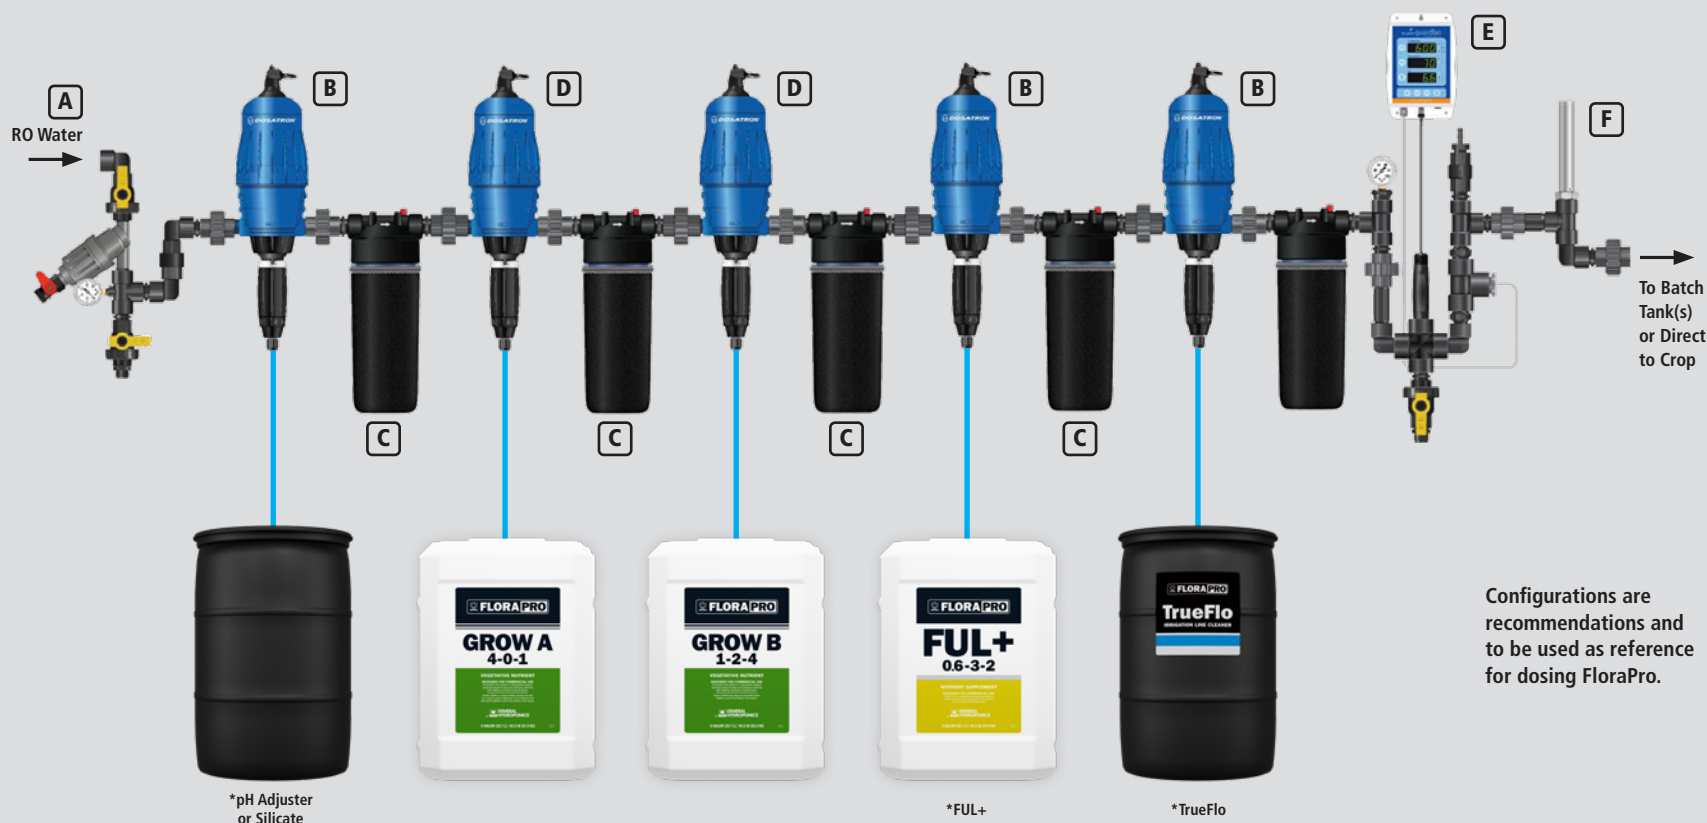

Configurations are recommendations and to be used as reference for dosing FloraPro.



If you have questions or are looking for alternative options please contact Sales@GeneralHydroponics.com or Dosatron support at 1-800-523-8499

Tag	Qty	Part Number	Description
A	1	HYKSTART-STD	Lo-Flo 3/4" Standard Starter Kit
*B	3	D14MZ3000VFBPHY D14MZ3000AFBPHY	14 GPM Dosing Pump 1.25 – 11 mL
C	4	HYKMC34	Lo-Flo 3/4" Mixing Chamber Kit
D	2	D14MZ1000BPVFHY	14 GPM Dosing Pump 3.75 – 37.5 mL
E	1	HYKMON	Lo-Flo 3/4" Monitor Kit
F	1	WHA34-SS-KIT	Water Hammer Arrestor Kit

*SEAL OPTIONS

Viton Seals (VF) For products with neutral to acidic pH.
(pH Down, FUL+ & TrueFlo)

Aflas Seals (AF) For products with a higher than neutral to alkaline pH. (Silicates & pH Up)