




An Ingersoll Rand Business

POWDER FEED PROGRAM | FLOWER LAYOUT

LO-FLO PANEL CONFIGURATION

LO-FLO rated for 0.05–14 GPM or 4.3–85 PSI.

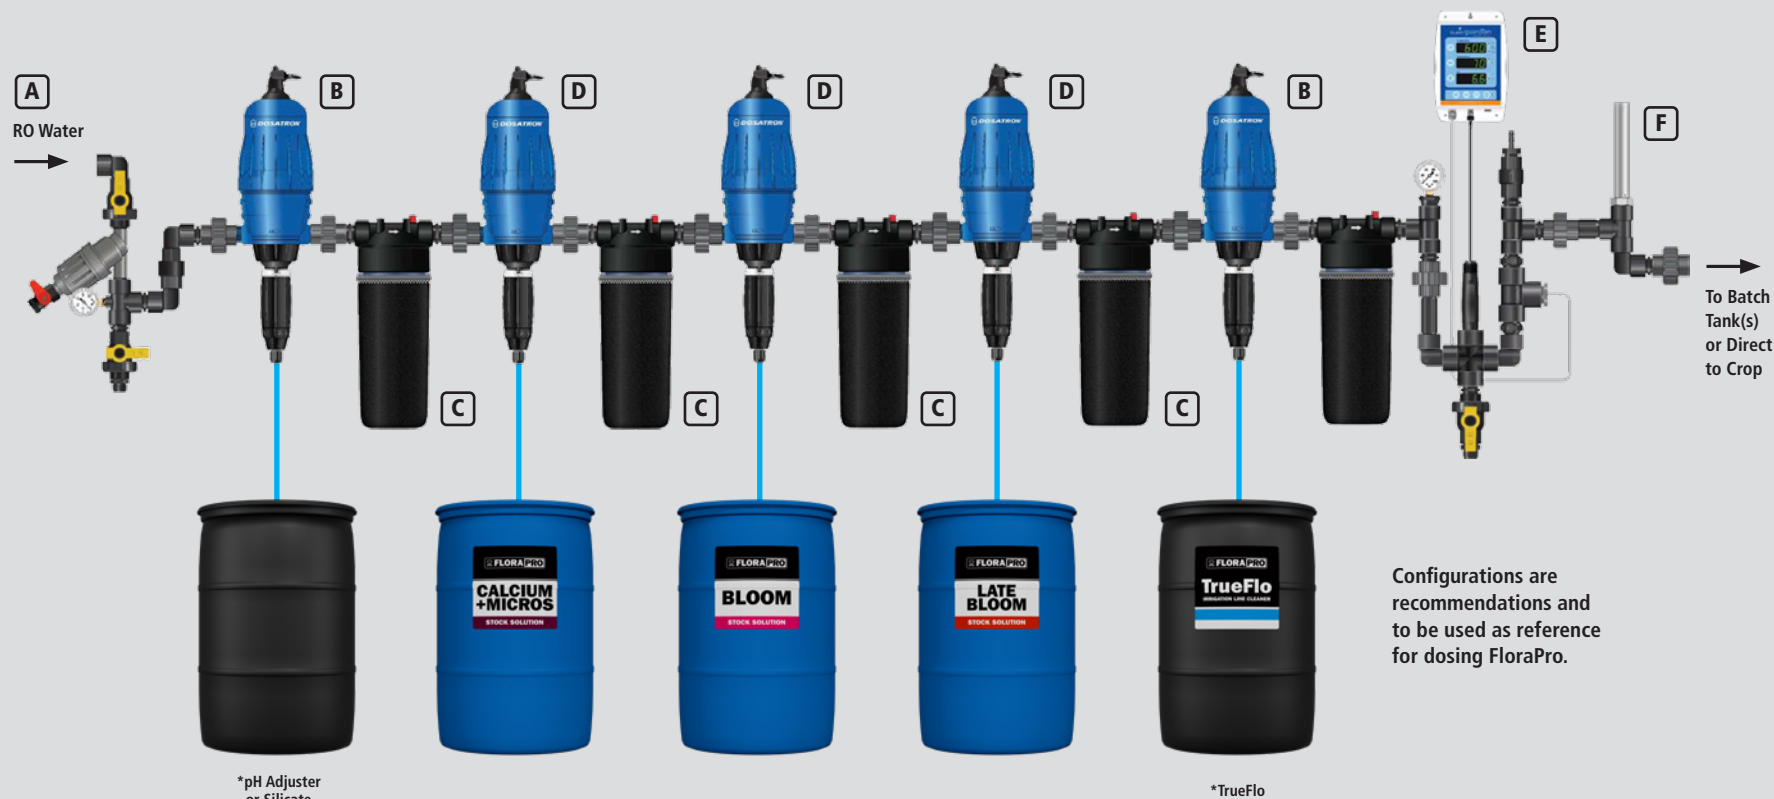

Configurations are recommendations and to be used as reference for dosing FloraPro.



If you have questions or are looking for alternative options please contact Sales@GeneralHydroponics.com or Dosatron support at 1-800-523-8499

Tag	Qty	Part Number	Description
A	1	HYKSTART-STD	Lo-Flo 3/4" Standard Starter Kit
*B	2	D14MZ3000VFBPHY D14MZ3000AFBPHY	14 GPM Dosing Pump 1.25 – 11 mL
C	4	HYKMC34	Lo-Flo 3/4" Mixing Chamber Kit
D	3	D14MZ1000BPVPHY	14 GPM Dosing Pump 3.75 – 37.5 mL
E	1	HYKMON	Lo-Flo 3/4" Monitor Kit
F	1	WHA34-SS-KIT	Water Hammer Arrestor Kit

*SEAL OPTIONS

Viton Seals (VF) For products with neutral to acidic pH. (pH Down & TrueFlo)

Aflas Seals (AF) For products with a higher than neutral to alkaline pH. (Silicates & pH Up)